


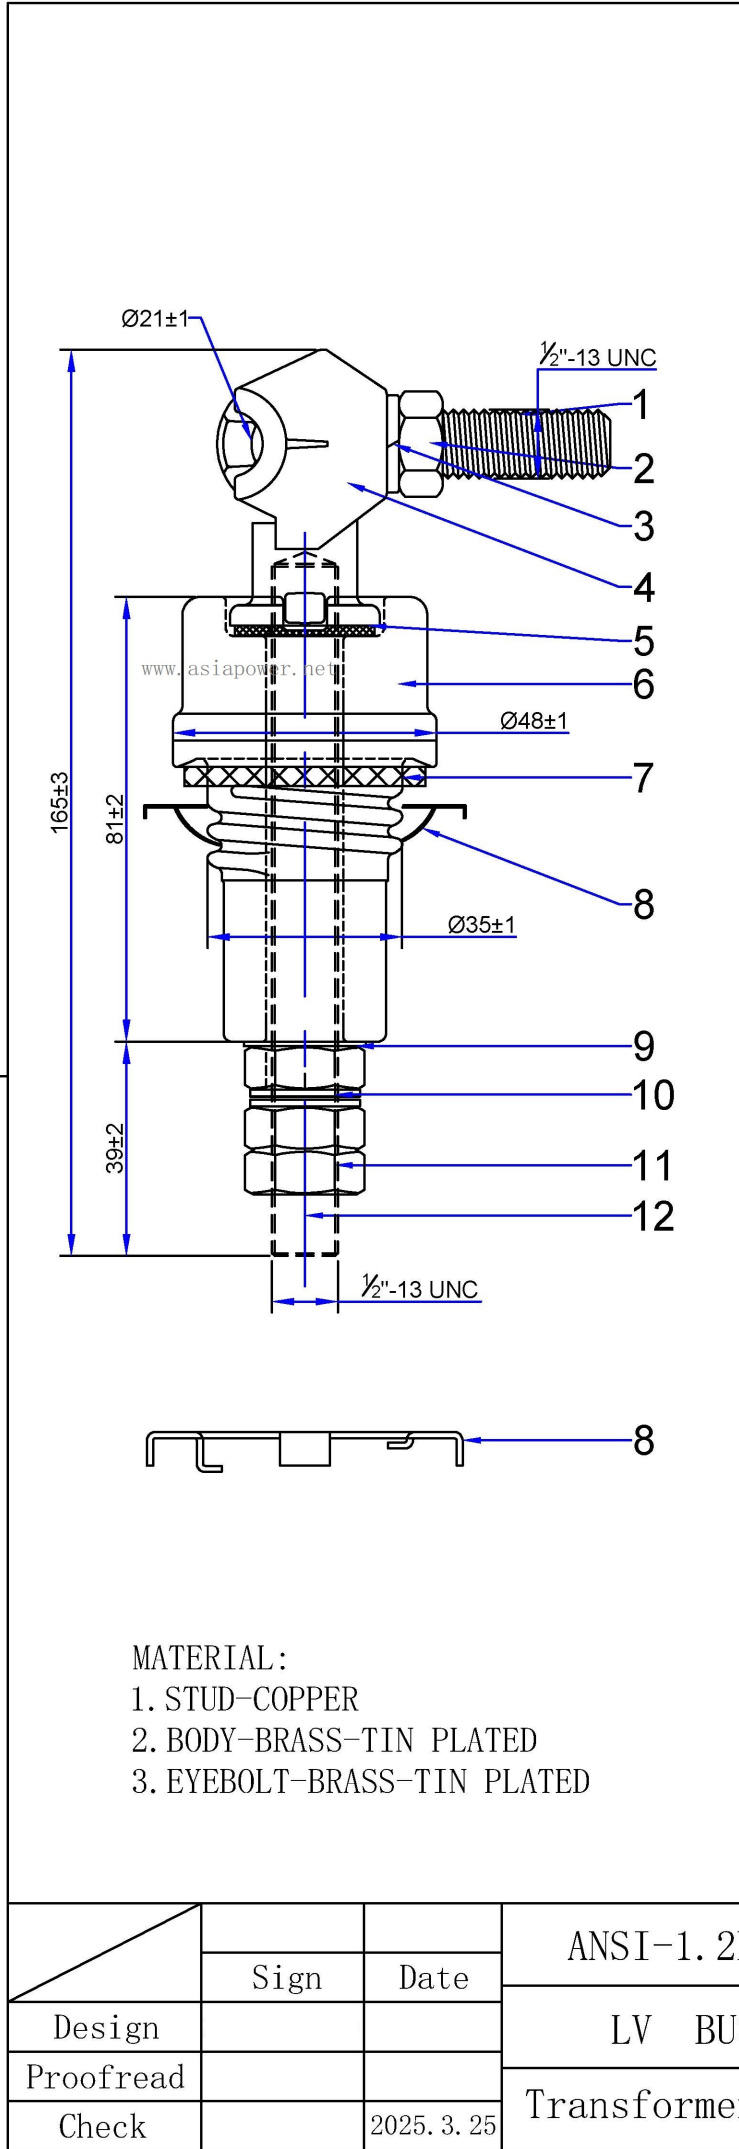

MATERIAL :

1. STUD-COPPER

2. BODY-BRASS-TIN PLATED

3. EYEBOLT-BRASS-TIN PLATED

POS/ 序号	Drawing No/ 图号	DESCRIPTION/ 名称	MATERIAL/ 材料	PCS/ 数量
1		Eye bolt / 拉紧销子	Brass/黄铜	1
2		Hex Nut 1/2"/ 1/2"螺母	Stainless steel/不锈钢	1
3		Spring washer/ 弹垫	Stainless steel/不锈钢	1
4		Terminal/ 拉紧端子	Brass/黄铜	1
5		Plain gasket/ 胶垫	NBR/丁腈	1
6		Porcelain/ 瓷瓶	Porcelain/ 陶瓷	1
7		Plain gasket/ 胶垫	NBR/丁腈	1
8		Spin-grip nut/ 花篮	Steel/弹簧钢	1
9		Flat washer/ 平垫圈	Stainless steel/不锈钢	1
10		Brass washer/ 黄铜垫圈	Brass/黄铜	2
11		Hex Nut 1/2"/ 1/2"螺母	Brass/黄铜	3
12		Stud/ 导电螺杆	Copper/紫铜	1

Technical requirements:


1. Rated Voltage=1.2KV

2. Rated Current=250A

3. Creepage Distance≥25mm

4. Lighting Impulse withstand voltage=30KV

5. Power-frequency withstand voltage (Dry) =10KV

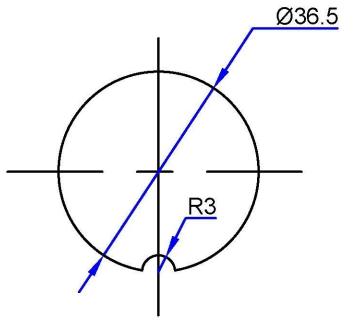

Tank hole dimensions

	Sign	Date	ANSI-1.2KV-250A		Weight	Scale
Design			LV BUSHING	Drawing number		
Proofread						
Check		2025. 3. 25	Transformer bushing	AsiaPower		